

RAY-WRIGHT PUMPS, INC.

2625 E. Sam Houston Pkwy. S. Pasadena, Tx 77503
 281-487-0665 1-800-482-0665



Cornell 6 X 6 Stainless Steel Prime Assist Pump Trailer Mount

Pump Number #333

Engine	John Deere
Model	4045D
HP	80
Oil Filter	B7322
Fuel Filter	BF7675-D
Air Filter	Balwin R53544/ Napa 6569
Maximum Head/Psi	150 FT/65 PSI
Maximum Flow	2700 GPM
Vacuum Prime	Solids 3"
Impeller 10"	Fuel Tank 60 Gal.
Weight 3850 Lbs.	Run Time 18 Hr.




All data is for clear water at 85 degree F.

All weights, dimensions, and capacity are approximate.

Feet x .305 = Meters
 Inches x 25.4 = Millimeters
 GPM x .227 = Cubic Meters/Hour
 GPM x 3.785 = Liters/Minute
 HP x .746 = KW

Speed	Impeller Dia.	Style	Solids Dia.	N _S	Suction	Discharge	No. vanes
VARIOUS	10.09"	ENCLOSED	3.0"	3300	8"	6"	2

SINGLE VOLUTE MOUNTING CONFIG.: CC, F, EM

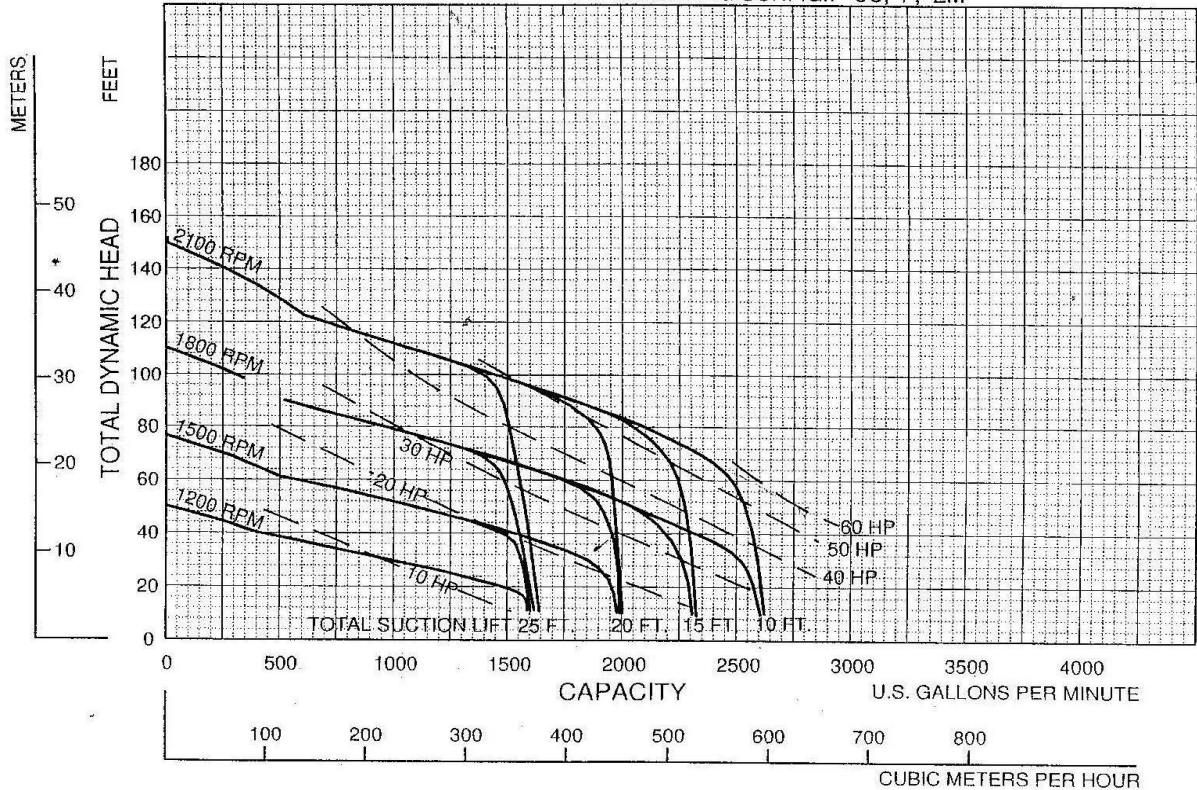

Add 1.5 HP for belt driven diaphragm vacuum pump. Performance curve does not include discharge check valve losses.

Performances shown are for cool water, frame mounted configuration with Cyclopaal®. Other liquids or mounting configurations may require performance adjustments.